

Blast-Resistant Clearspan Structures



LOSBERGER DE BOER

Engineered temporary facilities that protect personnel while keeping operations moving.



Maxiflex RP756™

Industries

- Oil & Gas
- Refineries
- Mining
- LNG
- Industrial Construction
- Power Generation
- Utilities

Applications

- Lunch Facilities
- Break Rooms
- Temporary Warehouses
- Command Centers
- Site Offices
- Fabrication Shops
- Medical Facilities
- Training Rooms
- Maintenance Shelters
- Equipment Storage



Worker Safety



Fast Deployment




Modular Flexibility





Features: API RP 756 Compliant Design

- Clearspan Interiors
- Fire-Retardant Membrane
- Lighting & Power Integration
- Rapid Installation
- High Wind Resistance
- Flooring Options
- Modular Expansion
- HVAC Compatible
- Personnel & Equipment Doors

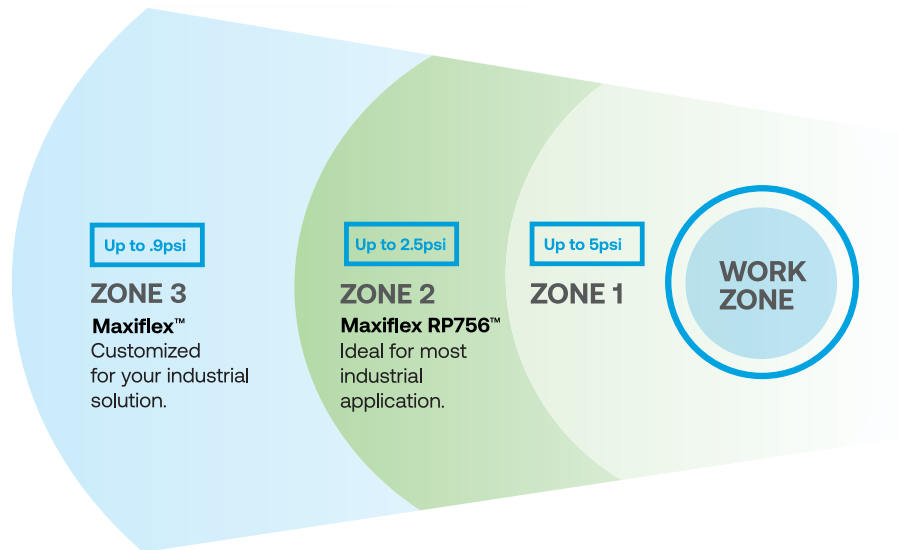

BLAST WAVE

3 psi peak pressure
Incident pulse of 60 psi-ms

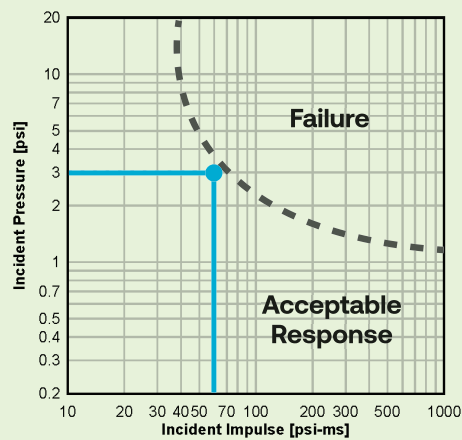


Figure 1. Acceptable Region (Shown in Blue) in P-i Space

