


uniflex Party and Exhibition Hall

Type: 10.3/280 · Model: 348

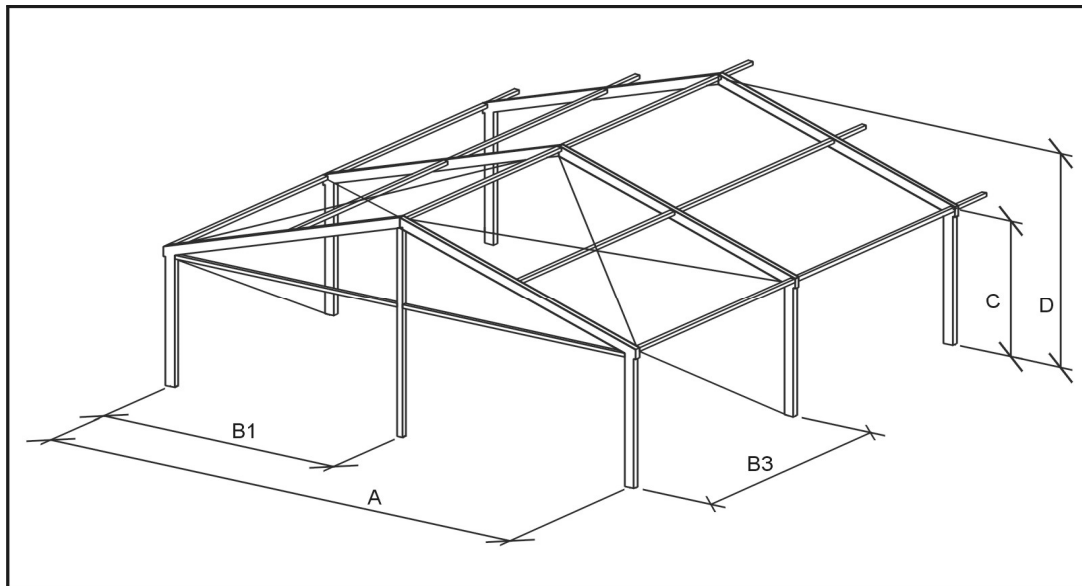

System Measures

Width	(A)	10.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	4.47 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.46 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request


Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!

uniflex Party and Exhibition Hall

Type: 10.3/340 · Model: 349

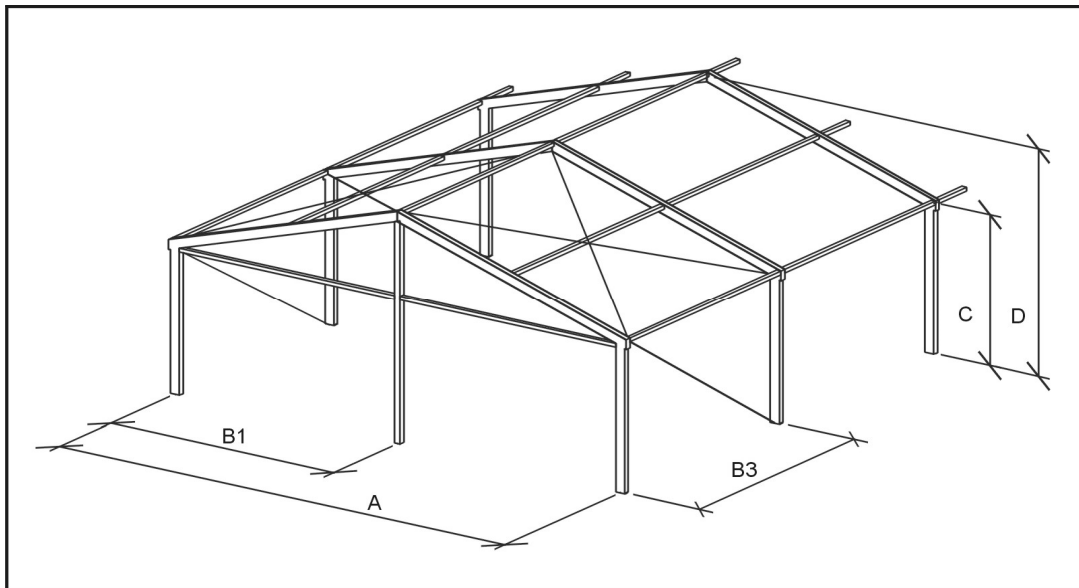

System Measures

Width	(A)	10.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	4.87 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.46 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request


Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!

uniflex Party and Exhibition Hall

Type: 10.3/400 · Model: 350

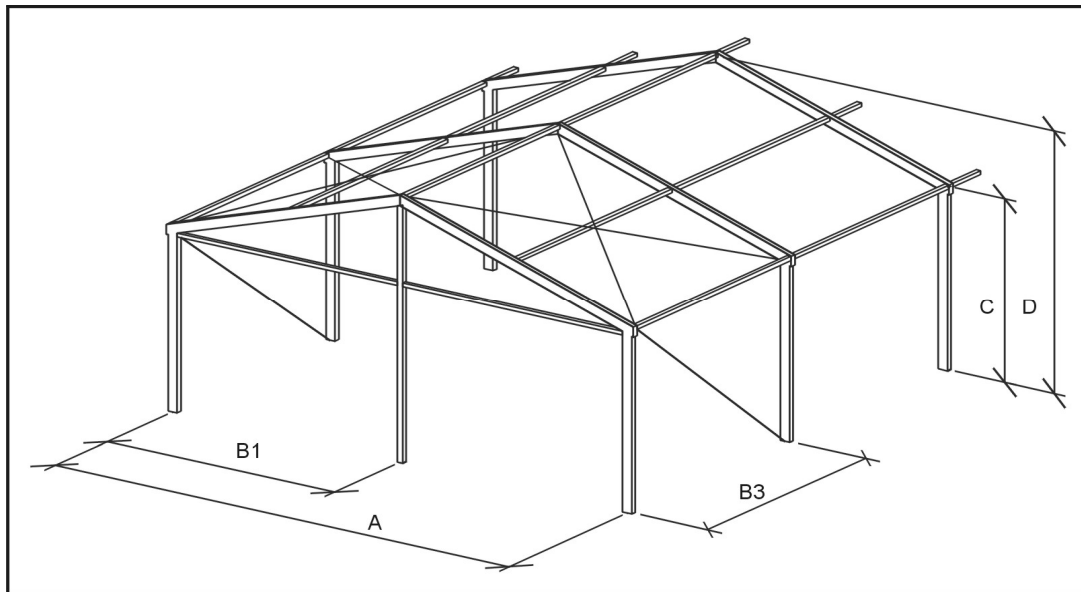

System Measures

Width	(A)	10.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.47 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.02 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request


Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!

uniflex Party and Exhibition Hall

Type: 10.3/540 · Model: 738

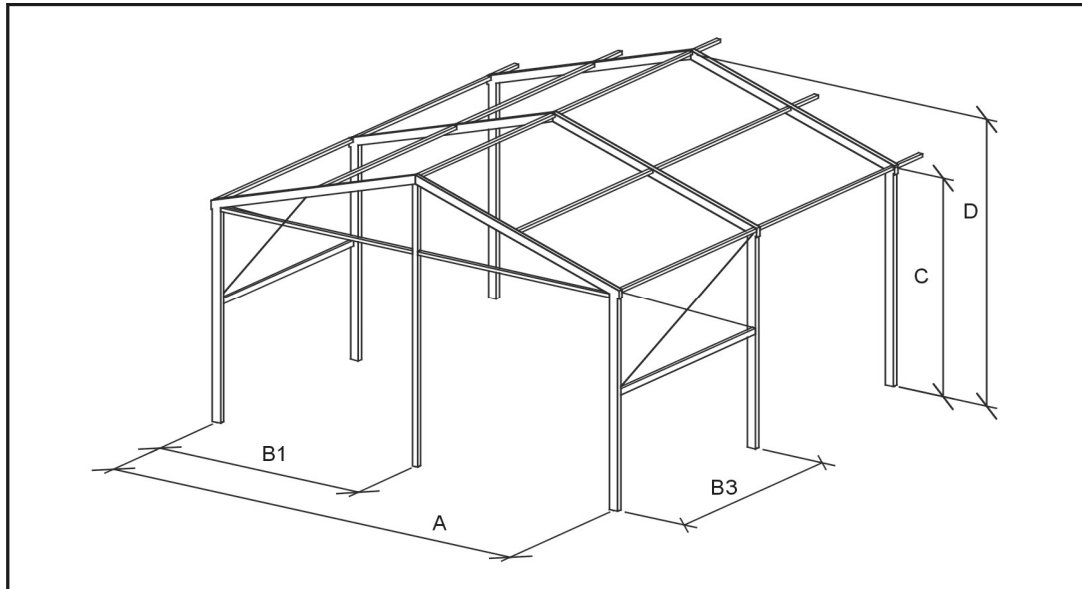

System Measures

Width	(A)	10.08 m
Eave height	(C)	5.24 m
Ridge height	(D)	6.88 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.75 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex Party and Exhibition Hall

Type: 12.3/280 · Model: 298

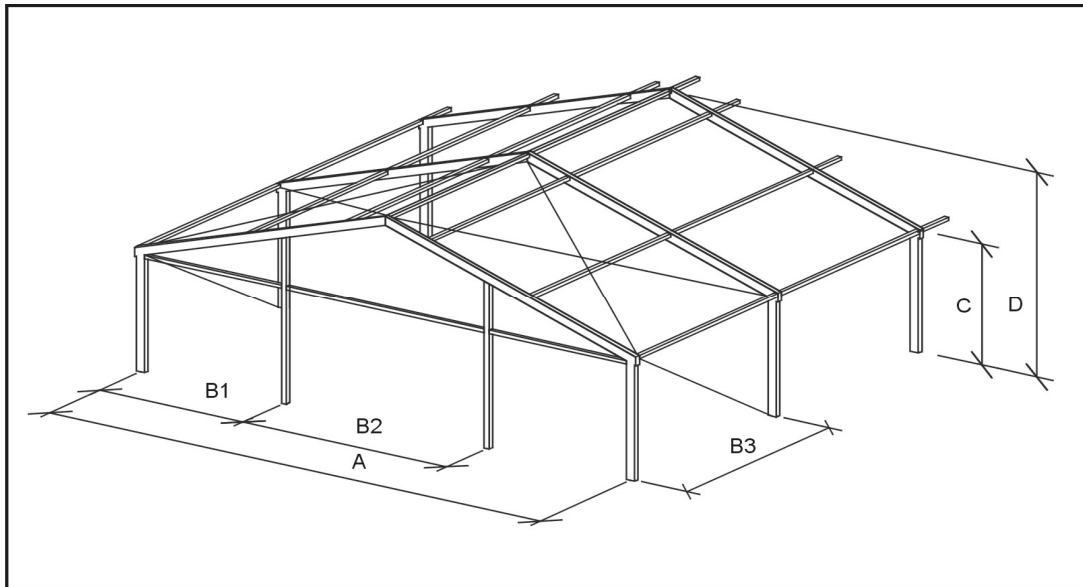

System Measures

Width	(A)	12.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	4.80 m
Gable truss	(B1)	3.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.50 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



uniflex Party and Exhibition Hall

Type: 12.3/340 · Model: 297

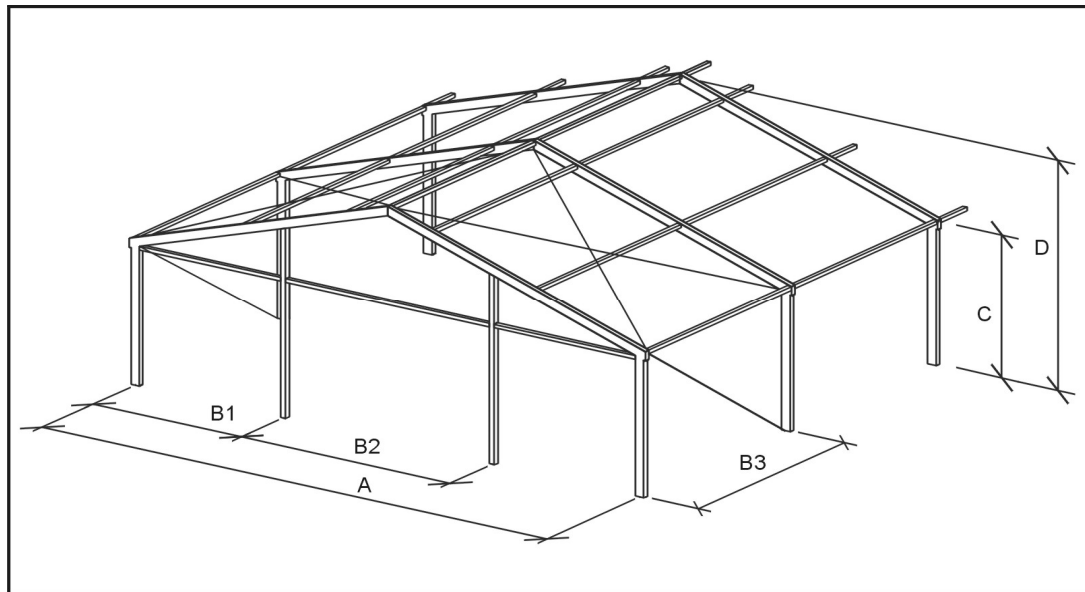

System Measures

Width	(A)	12.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	5.20 m
Gable truss	(B1)	3.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.50 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex Party and Exhibition Hall

Type: 12.3/400 · Model: 296

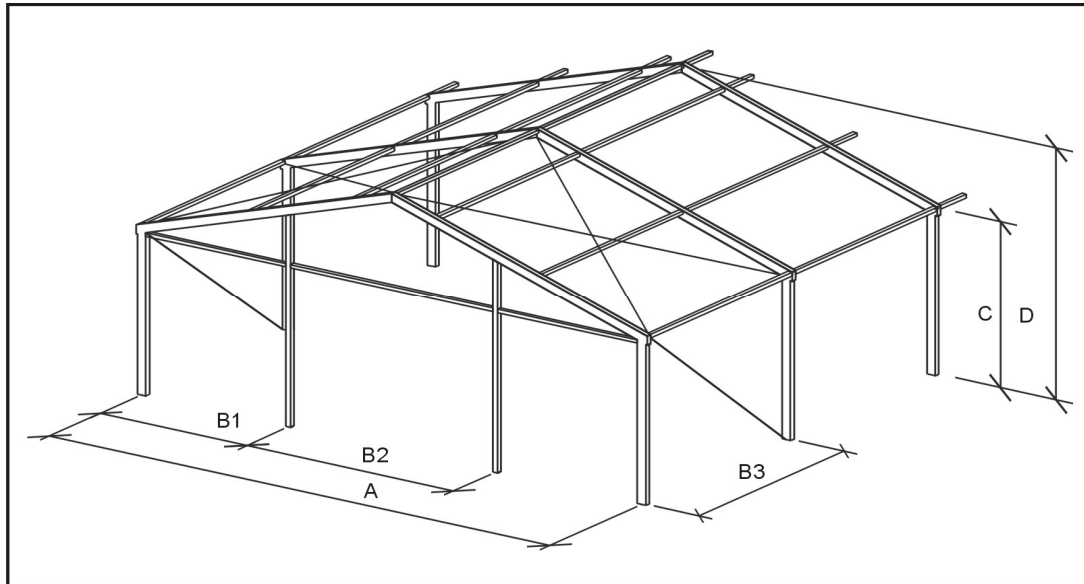

System Measures

Width	(A)	12.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.80 m
Gable truss	(B1)	3.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.50 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



uniflex Party and Exhibition Hall

Type: 15.3/340 · Model: 242

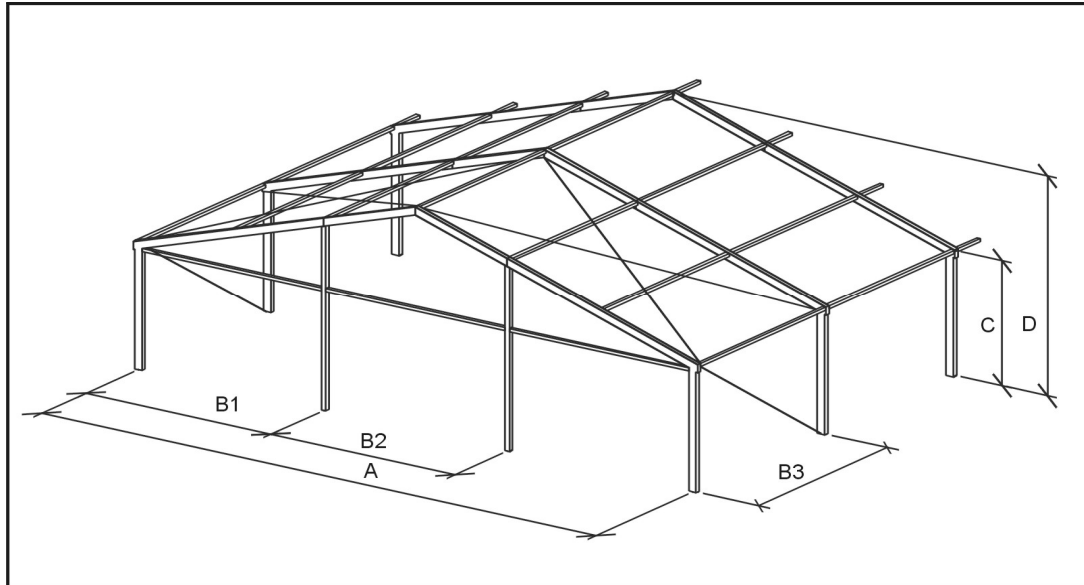

System Measures

Width	(A)	15.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	5.68 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



uniflex Party and Exhibition Hall

Type: 15.3/400 · Model: 243

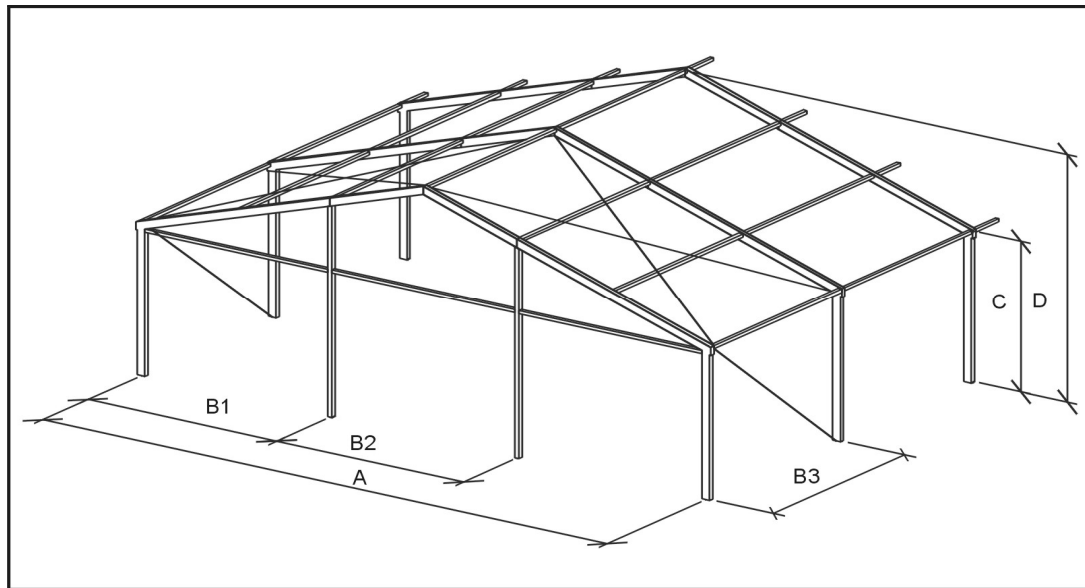

System Measures

Width	(A)	15.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	6.28 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex

Type: 18.3/340 · Model: XXX

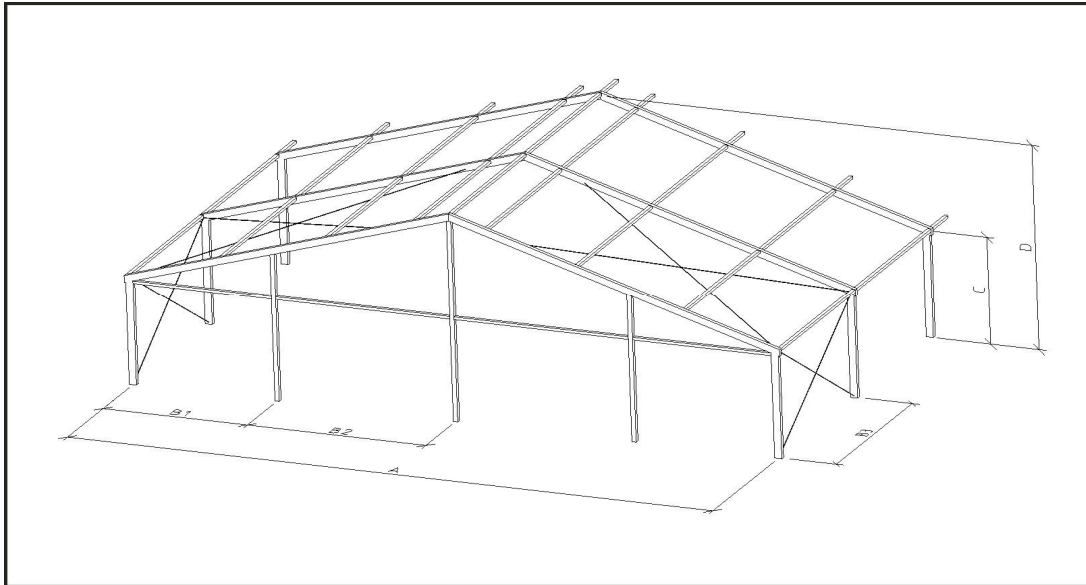

System Measures

Width	(A)	18.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	6.18 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	4.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		9.63 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex

Type: 18.3/400 · Model: XXX

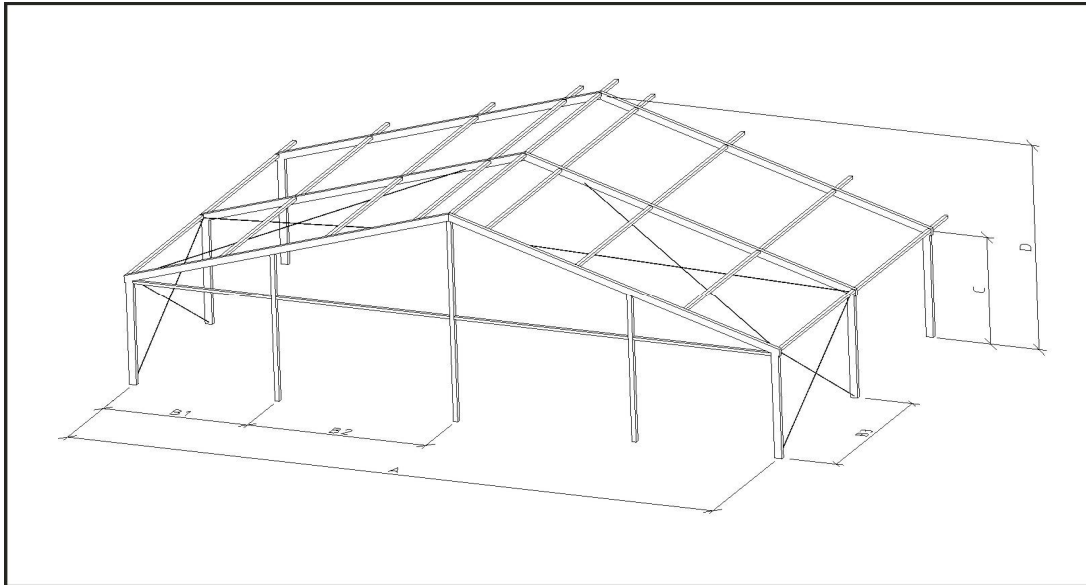

System Measures

Width	(A)	18.08 m
Eave height	(C)	3,84 m
Ridge height	(D)	6,68 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	4.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		9.63 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex Party and Exhibition Hall

Type: 20.3/280 · Model: 247

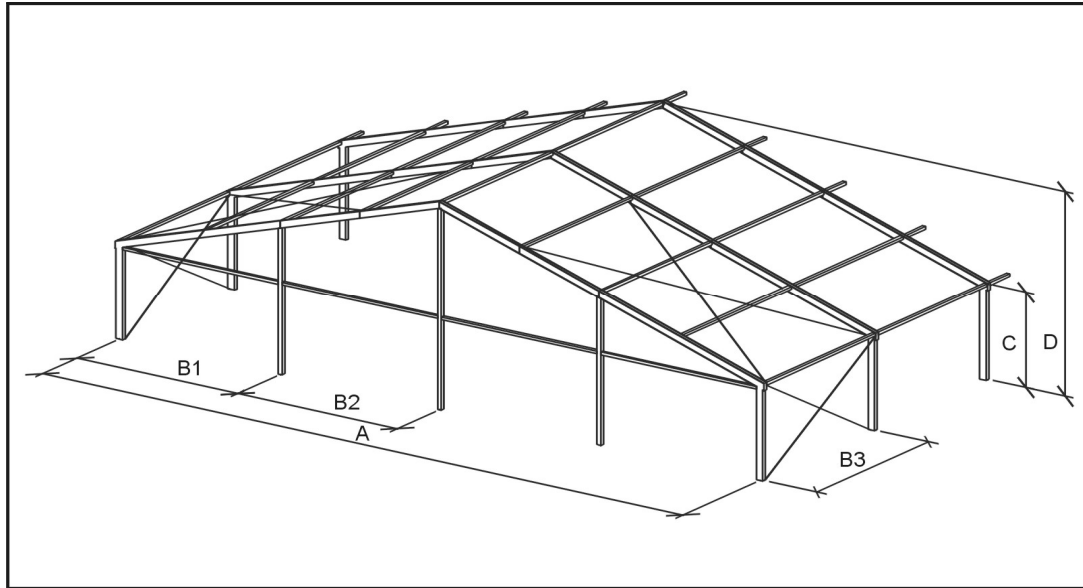

System Measures

Width	(A)	20.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	6.10 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.71 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex Party and Exhibition Hall

Type: 20.3/340 · Model: 248

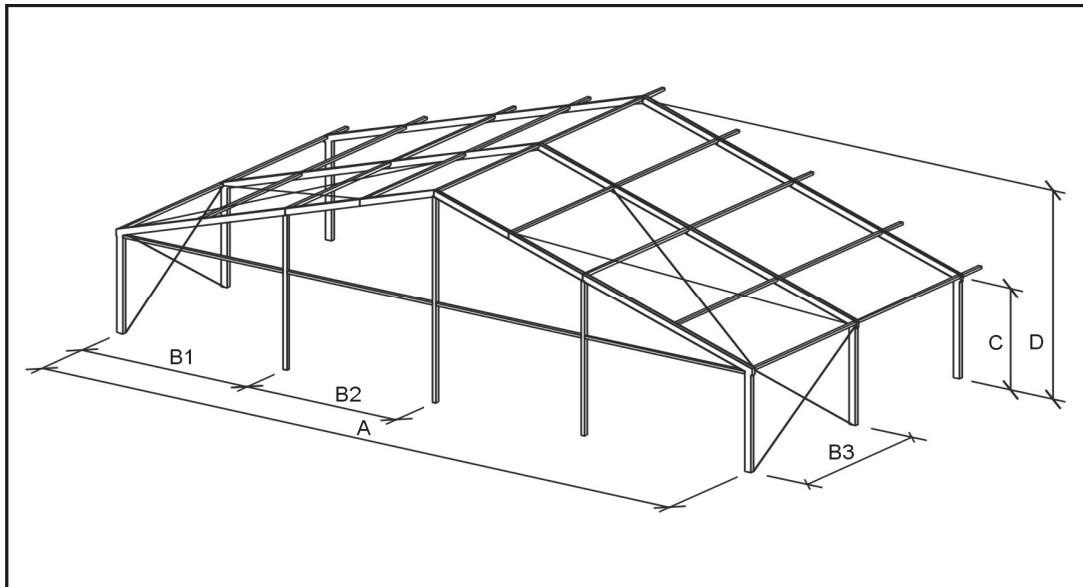

System Measures

Width	(A)	20.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	6.50 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.71 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



uniflex Party and Exhibition Hall

Type: 20.3/400 · Model: 249

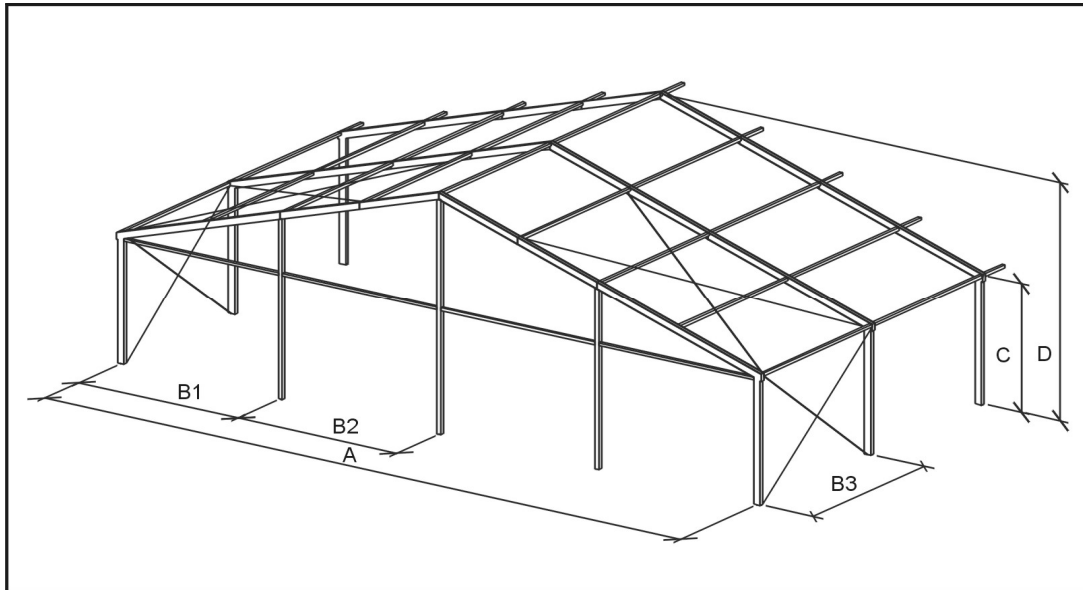

System Measures

Width	(A)	20.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	7.10 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.71 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex Party and Exhibition Hall

Type: 25.3/280 · Model: 253

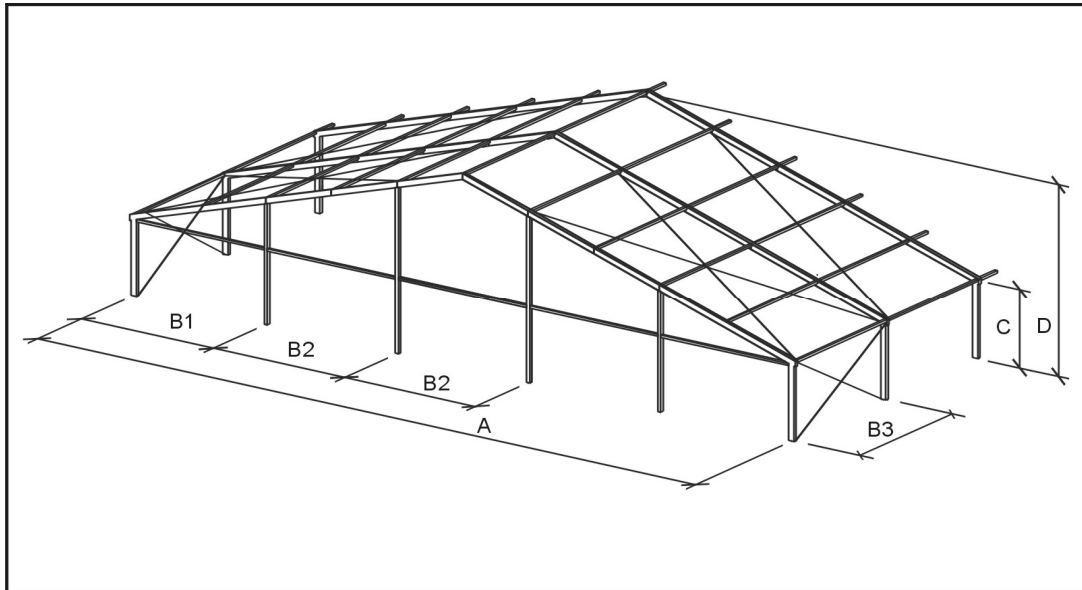

System Measures

Width	(A)	25.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	6.91 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex Party and Exhibition Hall

Type: 25.3/340 · Model: 254

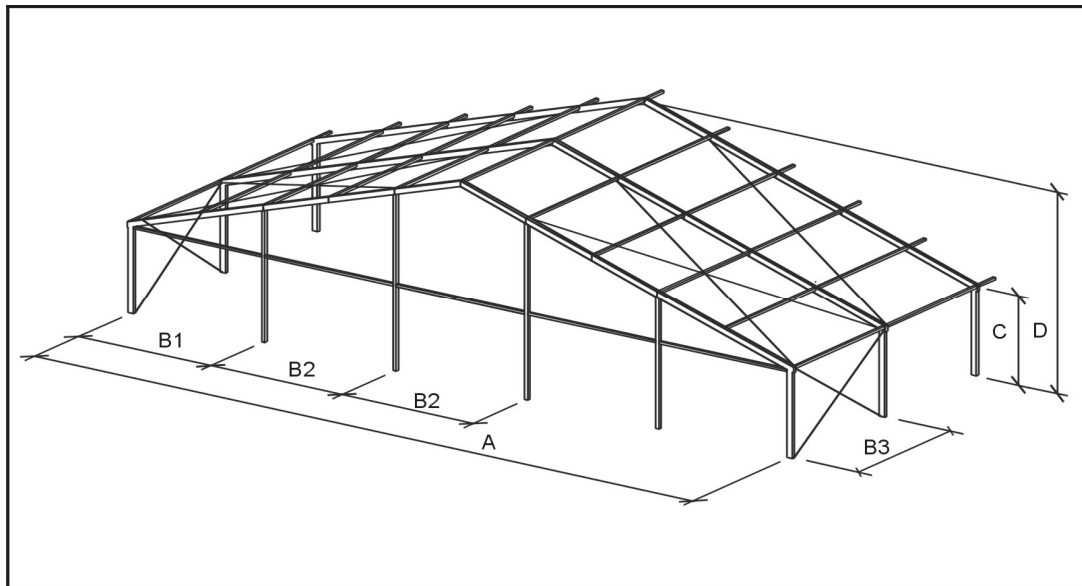

System Measures

Width	(A)	25.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	7.31 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex Party and Exhibition Hall

Type: 25.3/400 · Model: 702

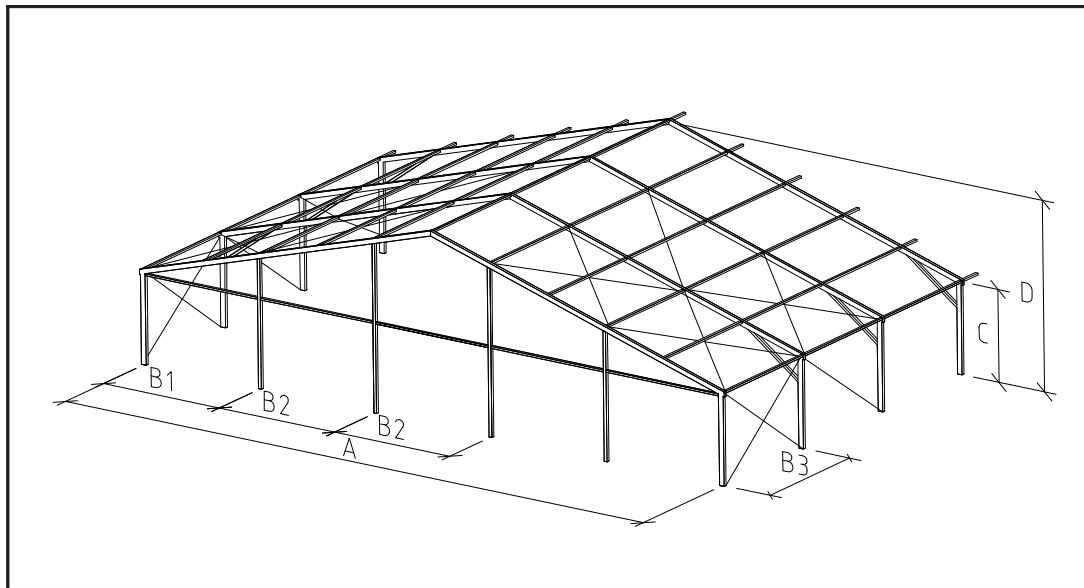

System Measures

Width	(A)	25.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	7.92 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



Big uniflex Party and Exhibition Hall LOSBERGER DE BOER

Type: 25.4/280 · Model: 354

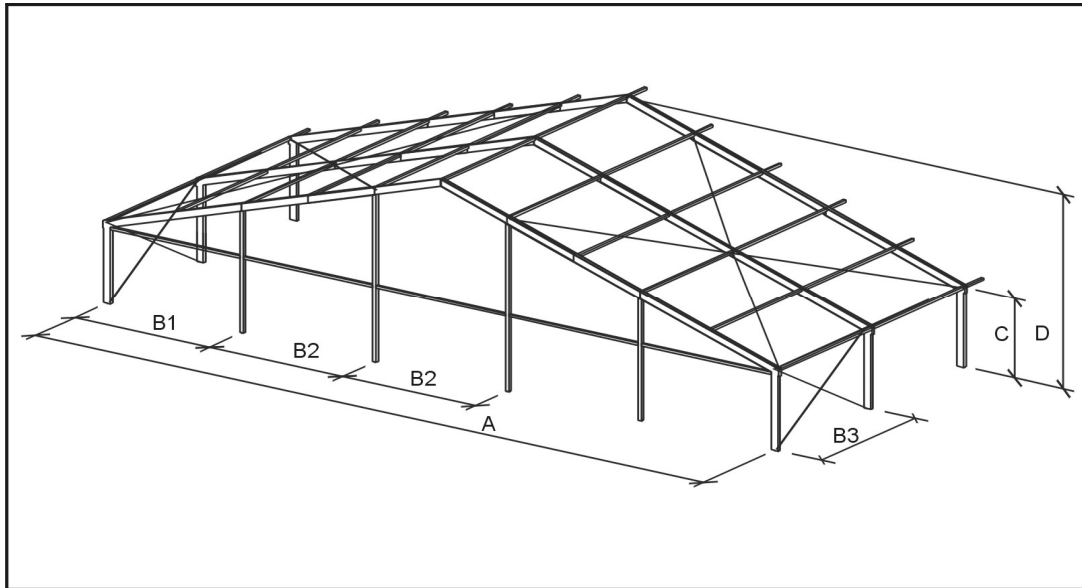

System Measures

Width	(A)	25.13 m
Eave height	(C)	2.85 m
Ridge height	(D)	6.93 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.97 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



Big uniflex Party and Exhibition Hall LOSBERGER DE BOER

Type: 30.4/280 · Model: 282

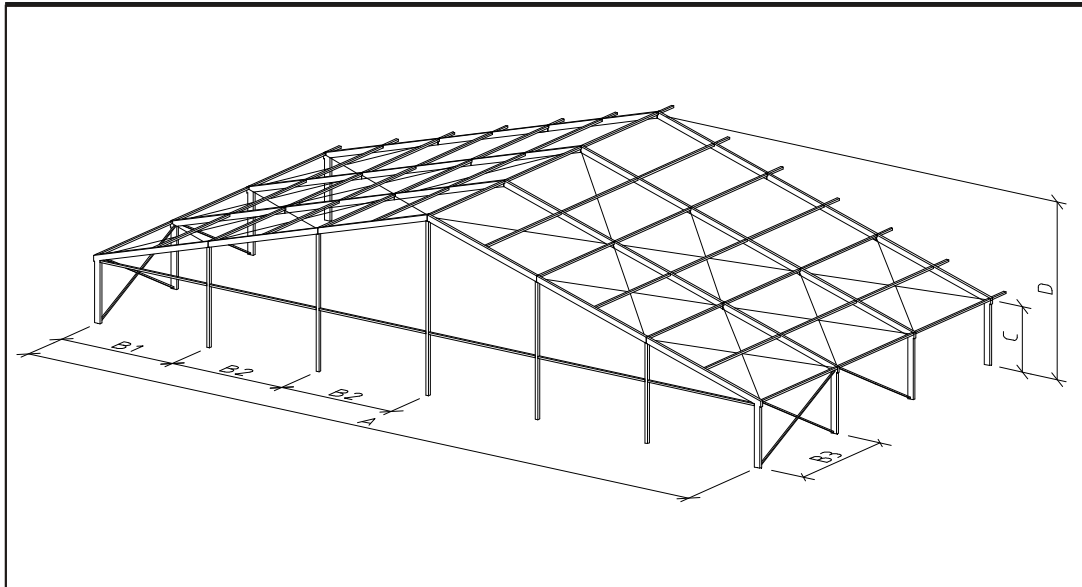

System Measures

Width	(A)	30.13 m
Eave height	(C)	2.84 m
Ridge height	(D)	7.63 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



Big uniflex Party and Exhibition Hall LOSBERGER DE BOER

Type: 25.4/340 · Model: 355

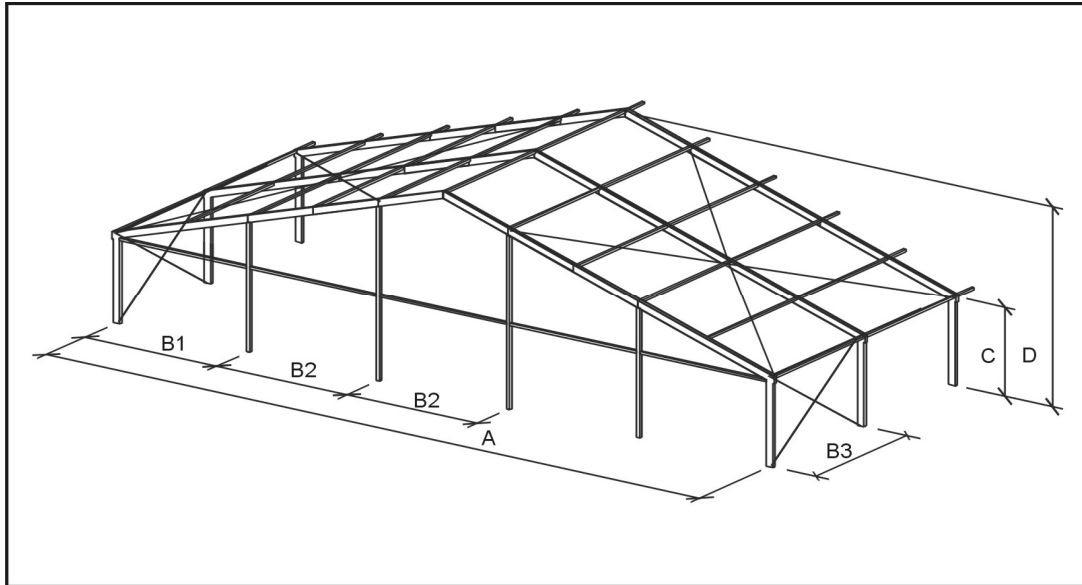

System Measures

Width	(A)	25.13 m
Eave height	(C)	3.25 m
Ridge height	(D)	7.33 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.97 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



Big uniflex Party and Exhibition Hall LOSBERGER DE BOER

Type: 25.4/400 · Model: 356

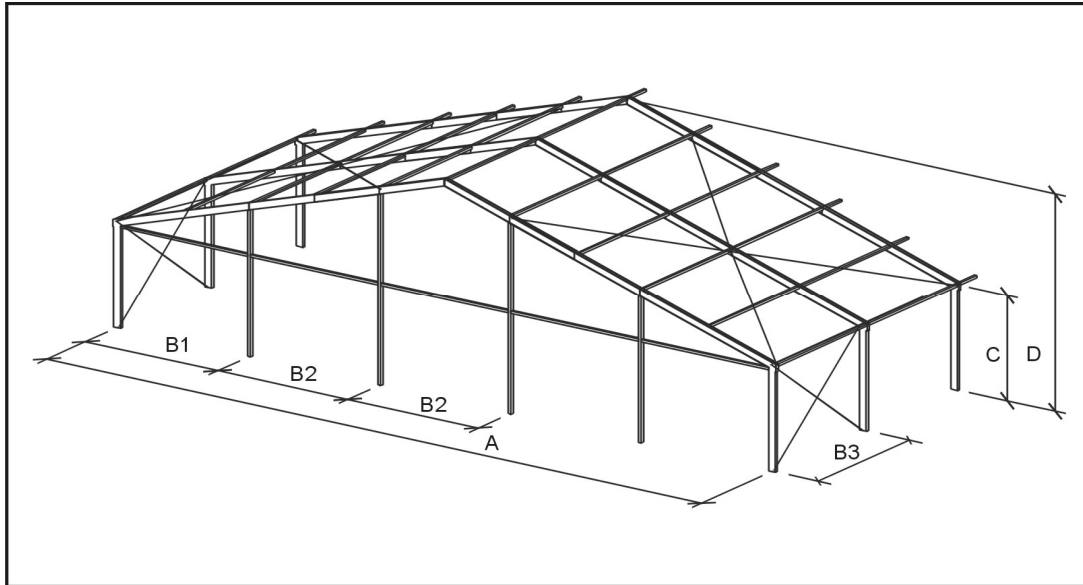

System Measures

Width	(A)	25.13 m
Eave height	(C)	3.85 m
Ridge height	(D)	7.93 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.97 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



Big uniflex Party and Exhibition Hall LOSBERGER DE BOER

Type: 20.4/280 · Model: 351

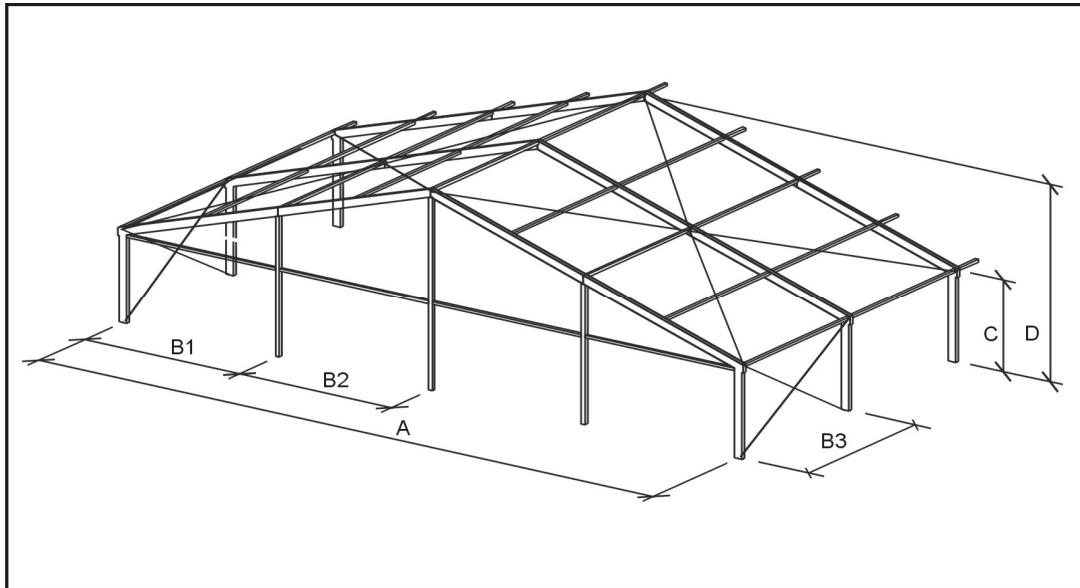

System Measures

Width	(A)	20.13 m
Eave height	(C)	2.85 m
Ridge height	(D)	6.12 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



Big uniflex Party and Exhibition Hall LOSBERGER DE BOER

Type: 30.4/340 · Model: 342

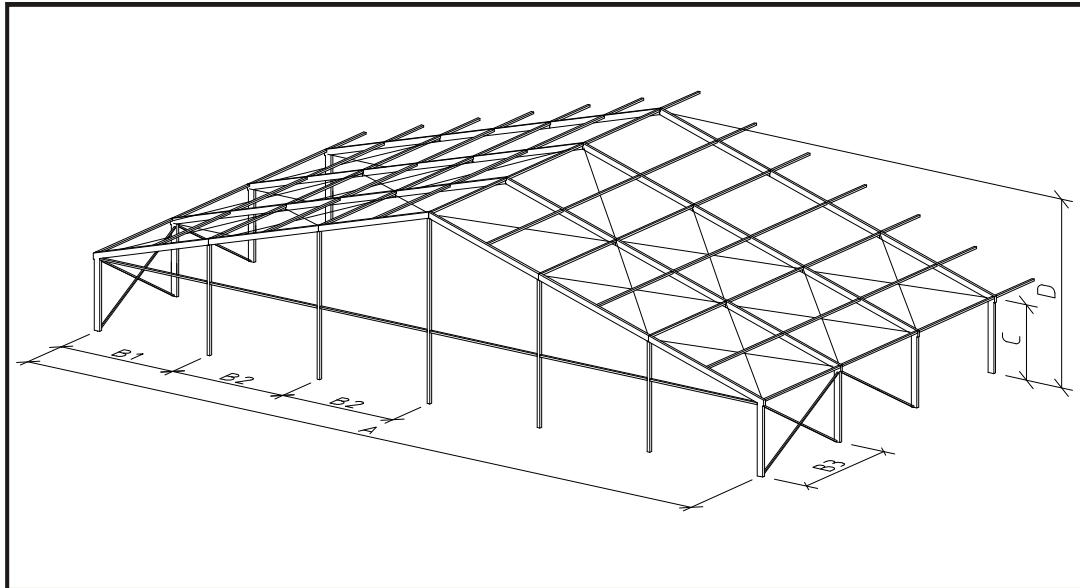

System Measures

Width	(A)	30.13 m
Eave height	(C)	3.24 m
Ridge height	(D)	8.03 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 25.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



Big uniflex Party and Exhibition Hall LOSBERGER DE BOER

Type: 30.4/400 · Model: 283

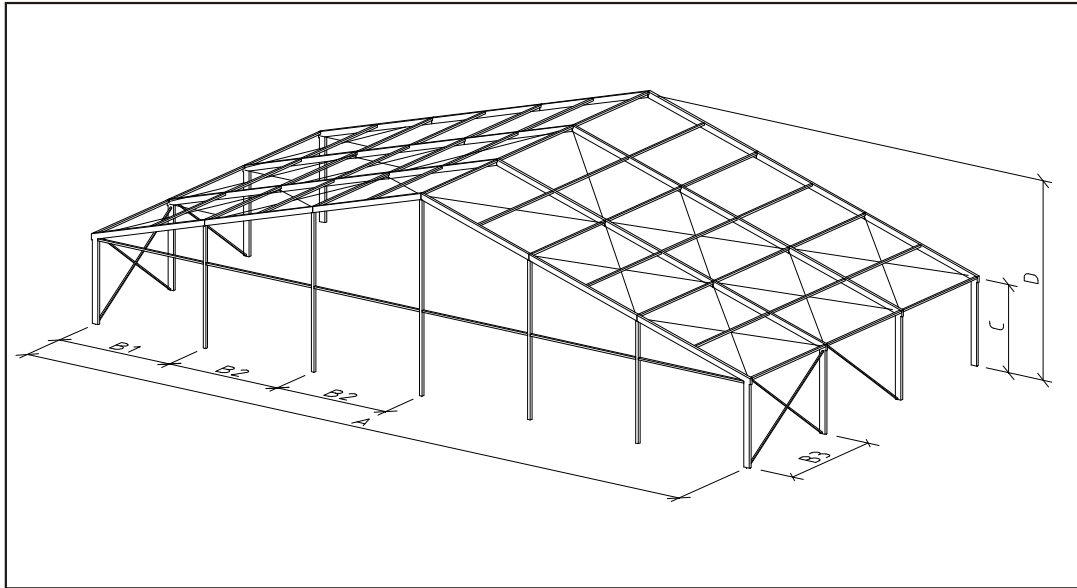

System Measures

Width	(A)	30.13 m
Eave height	(C)	3.84 m
Ridge height	(D)	8.63 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 25.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



Big uniflex Party and Exhibition Hall LOSBERGER DE BOER

Type: 20.4/340 · Model: 352

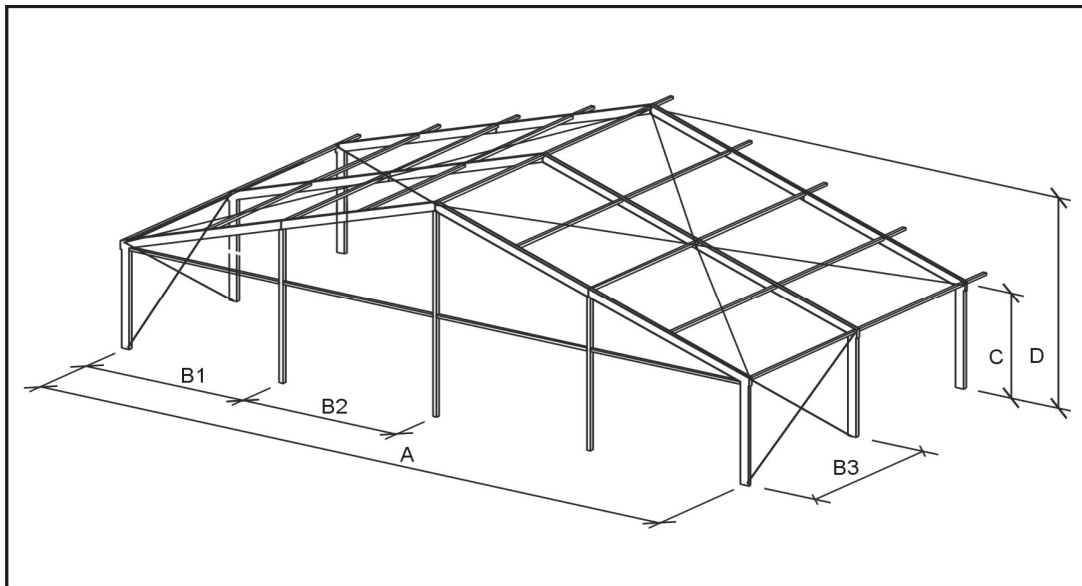

System Measures

Width	(A)	20.13 m
Eave height	(C)	3.25 m
Ridge height	(D)	6.52 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



Big uniflex Party and Exhibition Hall LOSBERGER DE BOER

Type: 20.4/400 · Model: 353

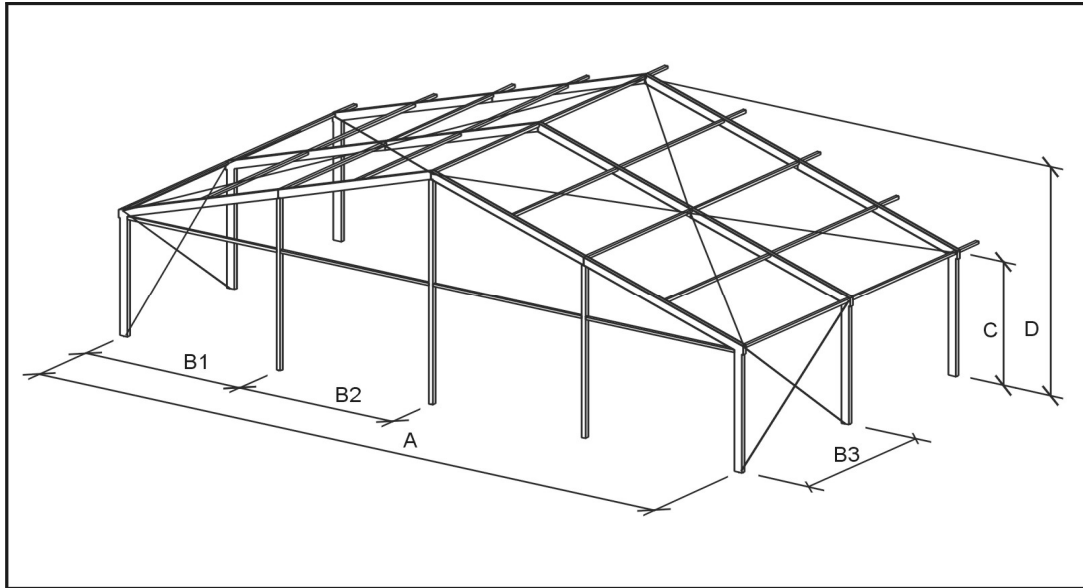

System Measures

Width	(A)	20.13 m
Eave height	(C)	3.85 m
Ridge height	(D)	7.12 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!




LOSBERGER DE BOER

uniflex Dome Area

Party and Exhibition Hall

Type: 10.3/340 · Model: 349

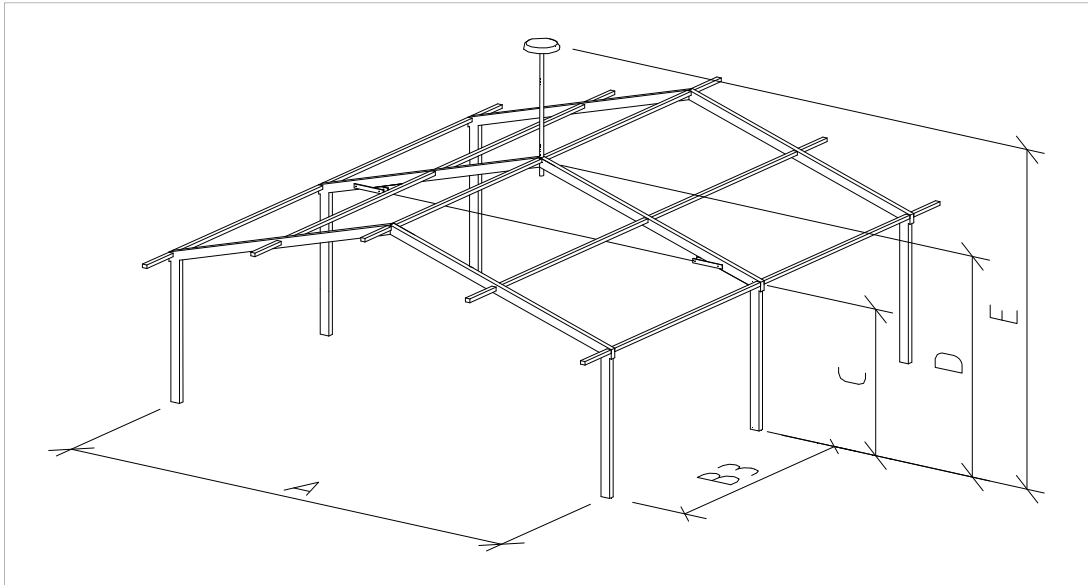

System Measures

Diameter	(A)	10.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	4.87 m
Peak height	(E)	7.40 m
Truss-distance	(B)	5.00 m
Longest component		0,00 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782

Subject to technical modifications!




LOSBERGER DE BOER

uniflex Dome Area

Party and Exhibition Hall

Type: 10.3/400 · Model: 350

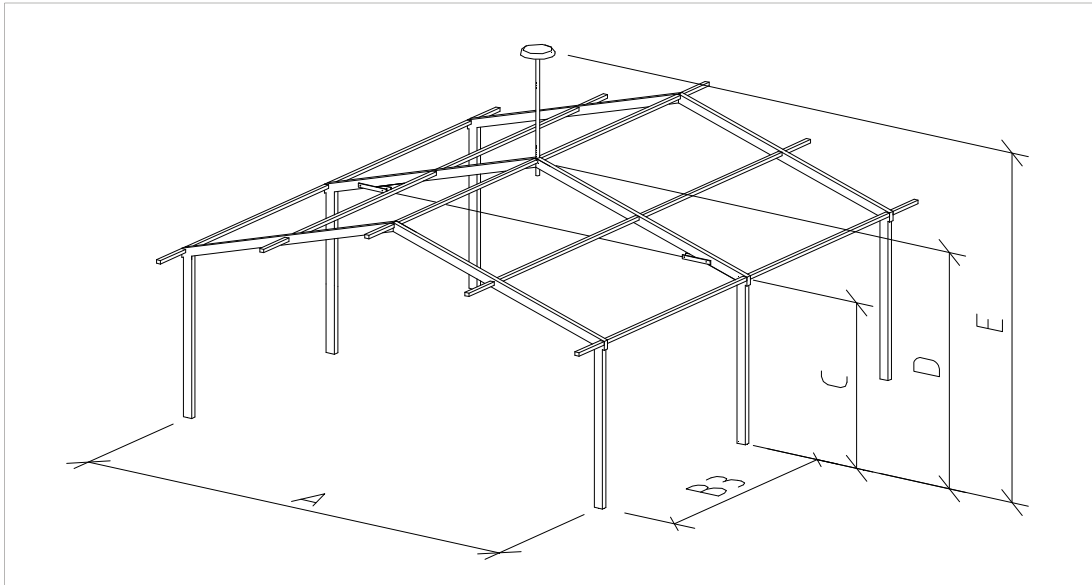

System Measures

Diameter	(A)	10.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.47 m
Peak height	(E)	8.00 m
Truss-distance	(B)	5.00 m
Longest component		0,00 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782

Subject to technical modifications!




LOSBERGER DE BOER

uniflex Dome Area

Party and Exhibition Hall

Type: 12.3/340 · Model: 297

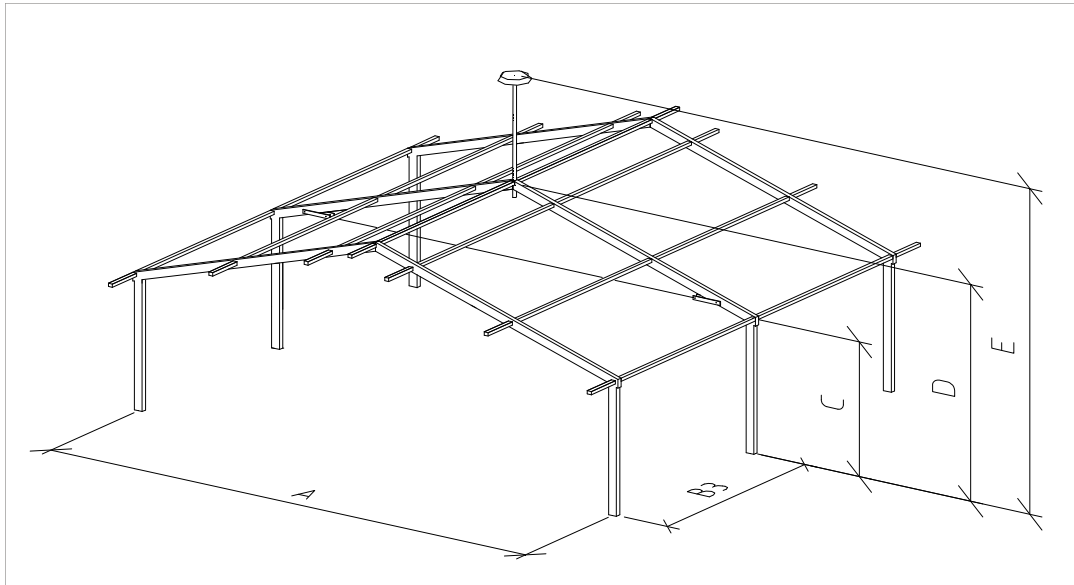

System Measures

Diameter	(A)	12.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	5.20 m
Peak height	(E)	7.90 m
Truss-distance	(B)	5.00 m
Longest component		0,00 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782

Subject to technical modifications!




LOSBERGER DE BOER

uniflex Dome Area

Party and Exhibition Hall

Type: 12.3/400 · Model: 296

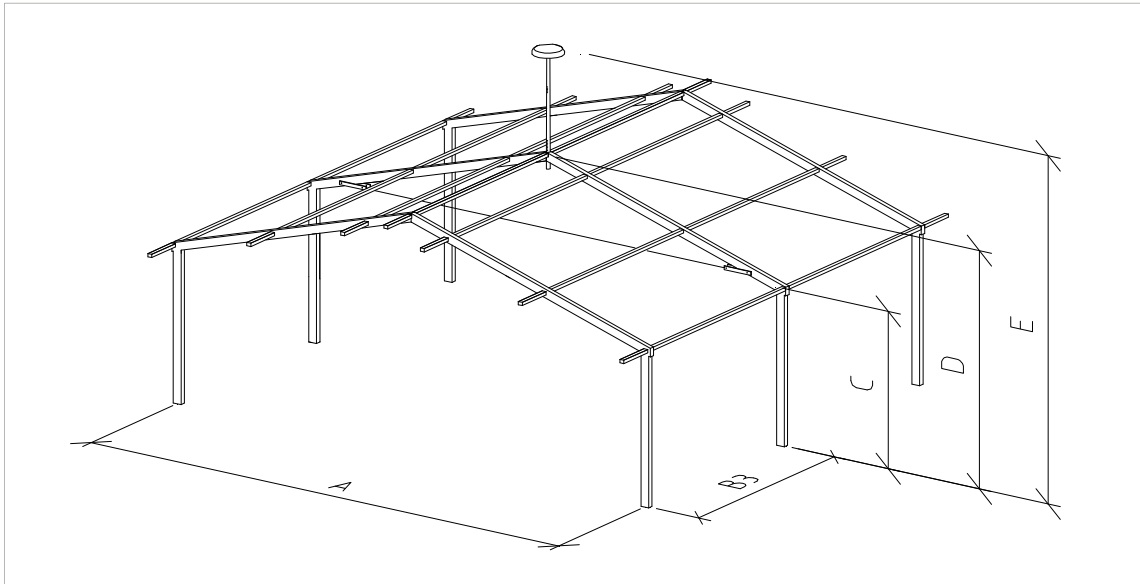

System Measures

Diameter	(A)	12.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.80 m
Peak height	(E)	8.50 m
Truss-distance	(B)	5.00 m
Longest component		0,00 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782

Subject to technical modifications!




LOSBERGER DE BOER

uniflex Dome Area

Party and Exhibition Hall

Type: 15.3/340 · Model: 242

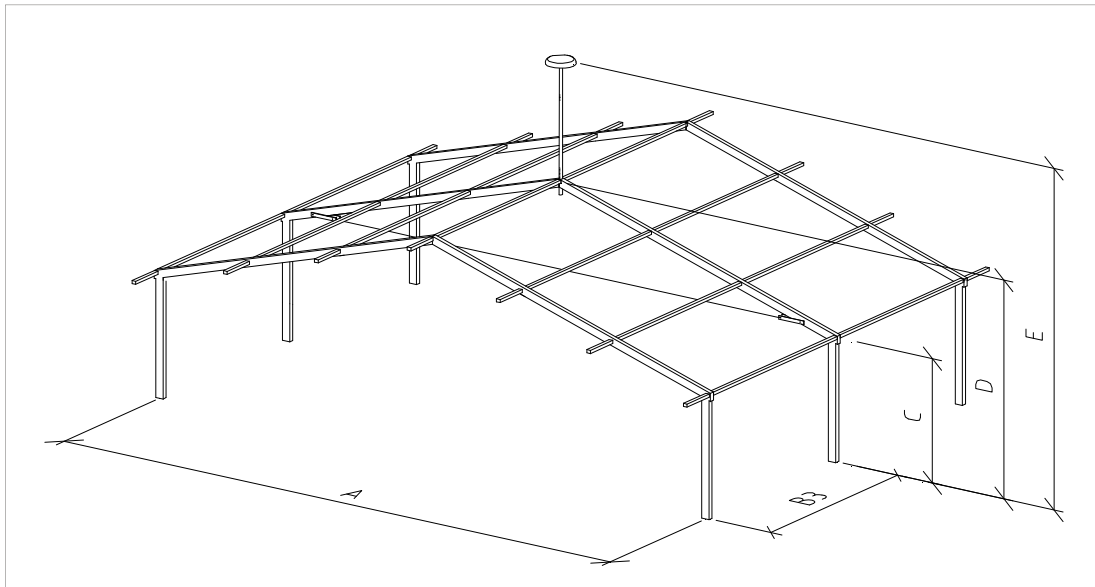

System Measures

Diameter	(A)	15.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	5.68 m
Peak height	(E)	8.90 m
Truss-distance	(B)	5.00 m
Longest component		0,00 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782

Subject to technical modifications!




LOSBERGER DE BOER

uniflex Dome Area

Party and Exhibition Hall

Type: 15.3/400 · Model: 243

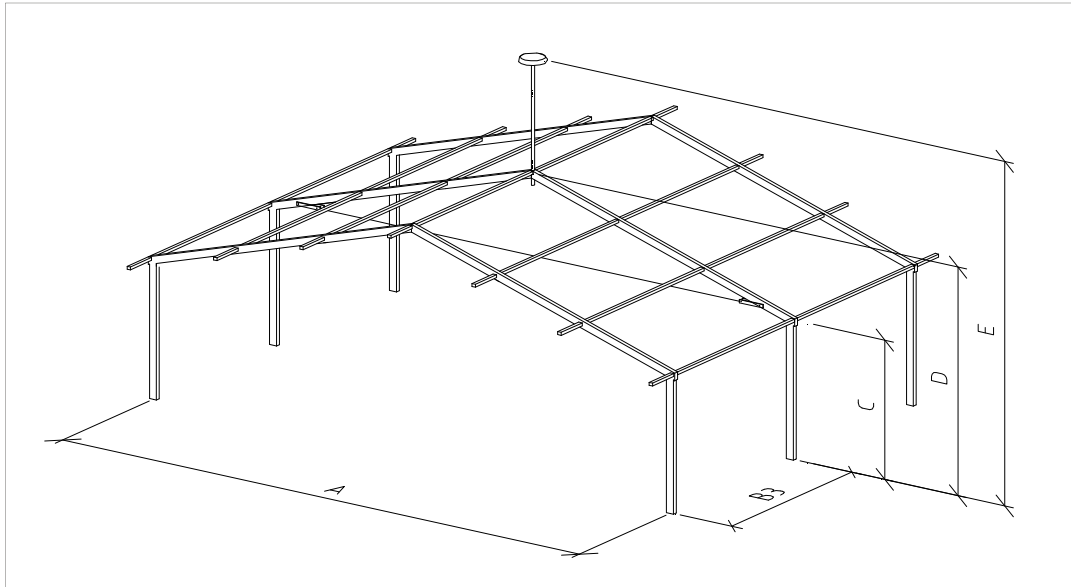

System Measures

Diameter	(A)	15.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	6.28 m
Peak height	(E)	9.50 m
Truss-distance	(B)	5.00 m
Longest component		0,00 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782

Subject to technical modifications!




LOSBERGER DE BOER

uniflex Dome Area

Party and Exhibition Hall

Type: 20.3/340 · Model: 248

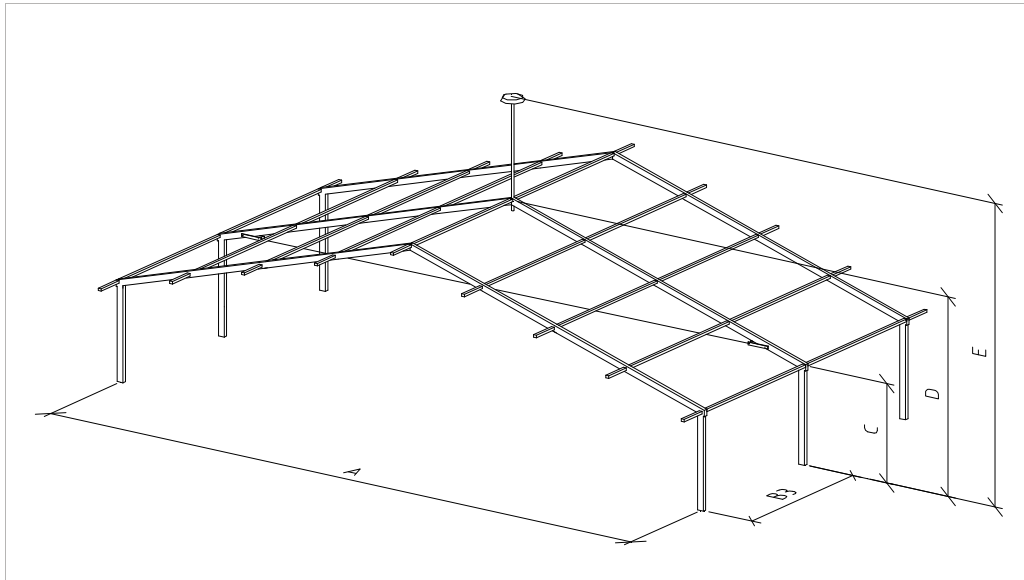

System Measures

Diameter	(A)	20.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	6.50 m
Peak height	(E)	9.90 m
Truss-distance	(B)	5.00 m
Longest component		0,00 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed

4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782


Subject to technical modifications!



LOSBERGER DE BOER

uniflex Dome Area Party and Exhibition Hall

Type: 20.3/400 · Model: 249

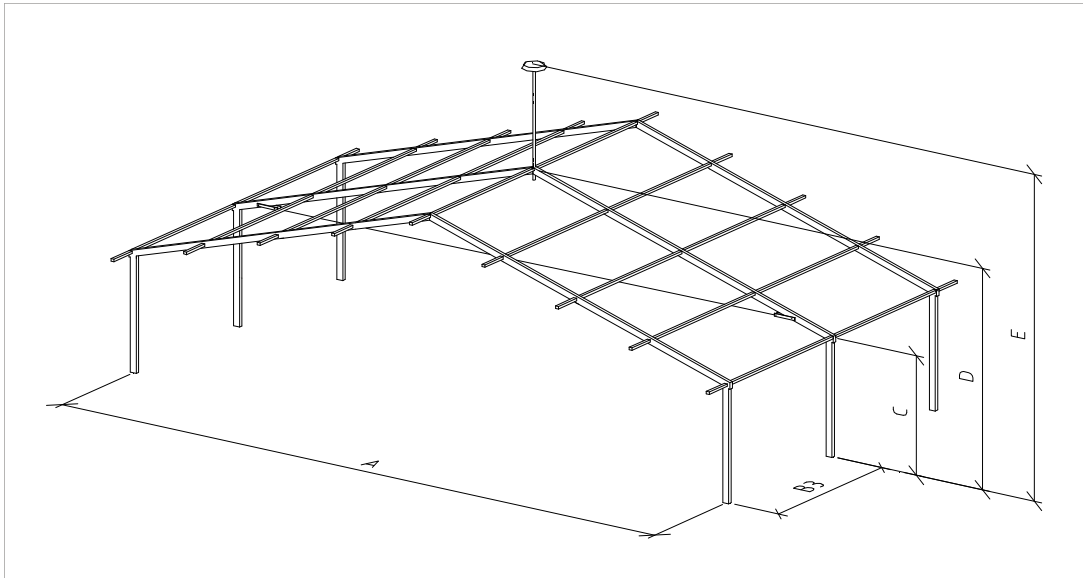

System Measures

Diameter	(A)	20.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	7.10 m
Peak height	(E)	10.50 m
Truss-distance	(B)	5.00 m
Longest component		0,00 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 10.3/340 · Model: 747

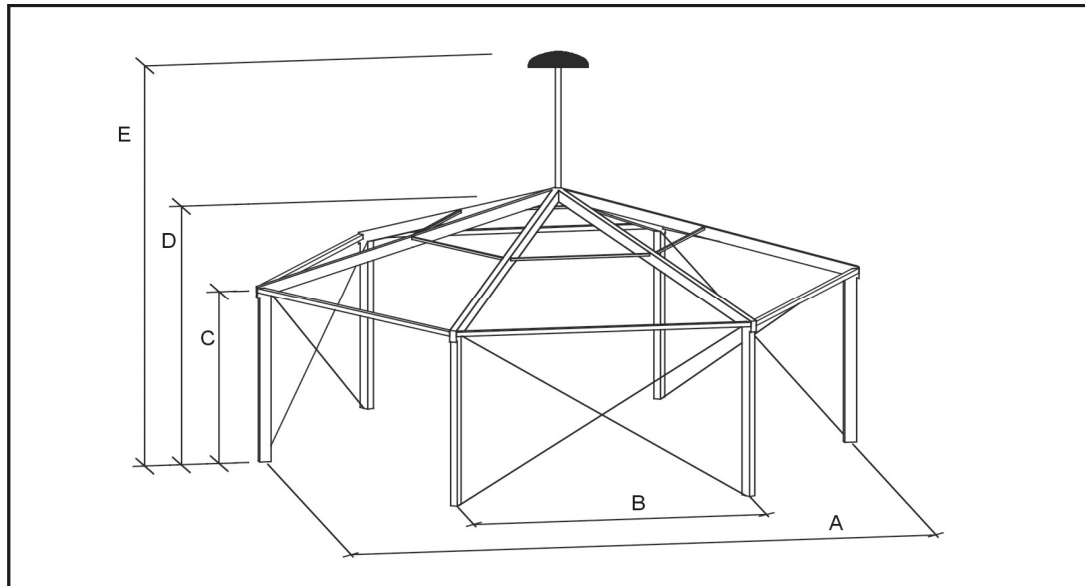

System Measures

Diameter	(A)	10.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	4.87 m
Peak height	(E)	7.30 m
Truss-distance	(B)	5.04 m
Longest component		5.45 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 10.3/400 · Model: 748

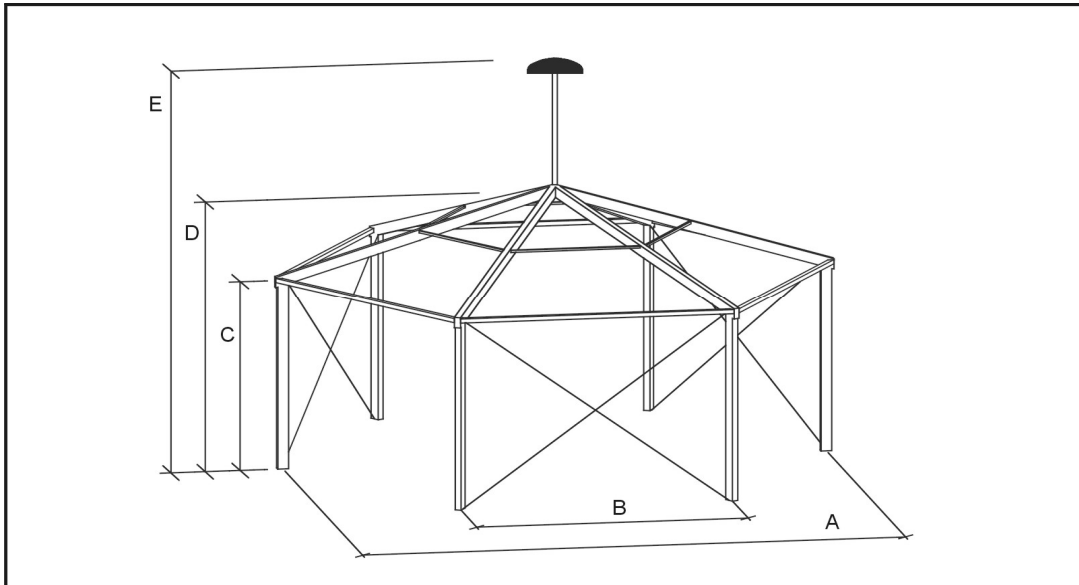

System Measures

Diameter	(A)	10.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.47 m
Peak height	(E)	7.90 m
Truss-distance	(B)	5.04 m
Longest component		5.45 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 12.3/400 · Model: 754

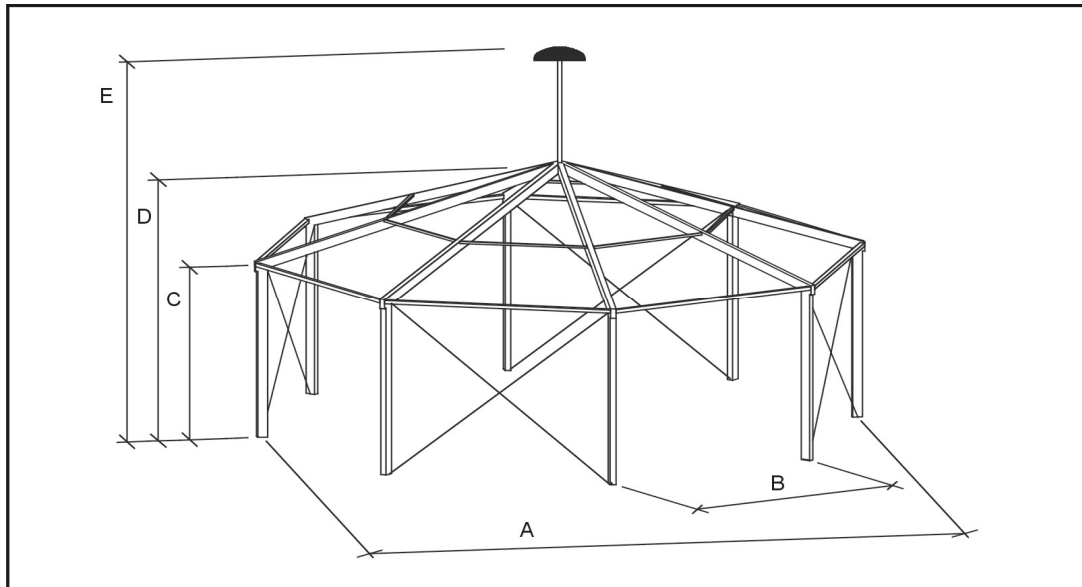

System Measures

Diameter	(A)	12.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.80 m
Peak height	(E)	8.30 m
Truss-distance	(B)	4.62 m
Longest component		6.28 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 12.3/340 · Model: 753

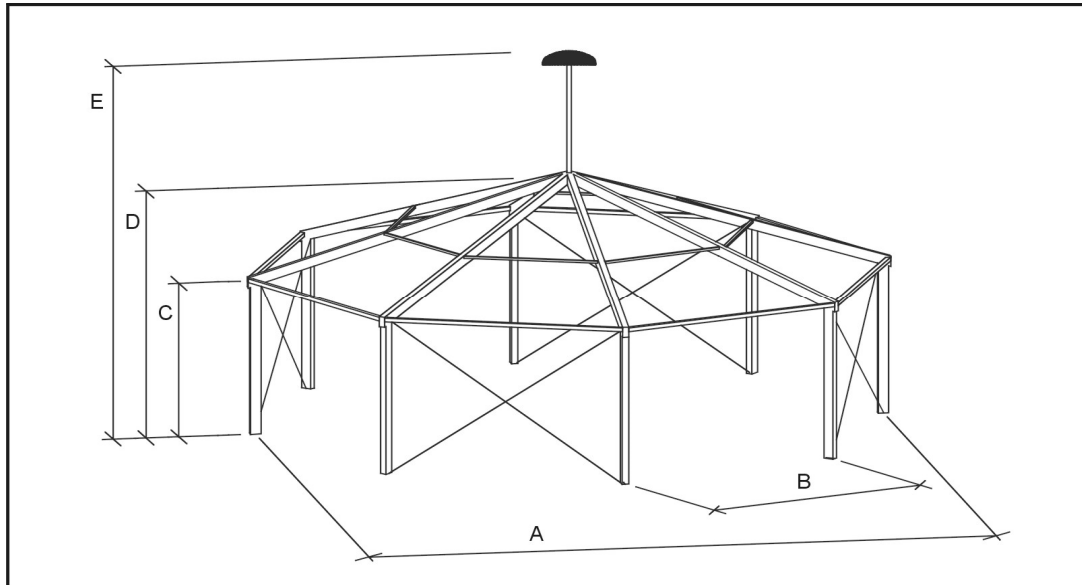

System Measures

Diameter	(A)	12.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	5.20 m
Peak height	(E)	7.70 m
Truss-distance	(B)	4.62 m
Longest component		6.28 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 12.3/400 · Model: 754

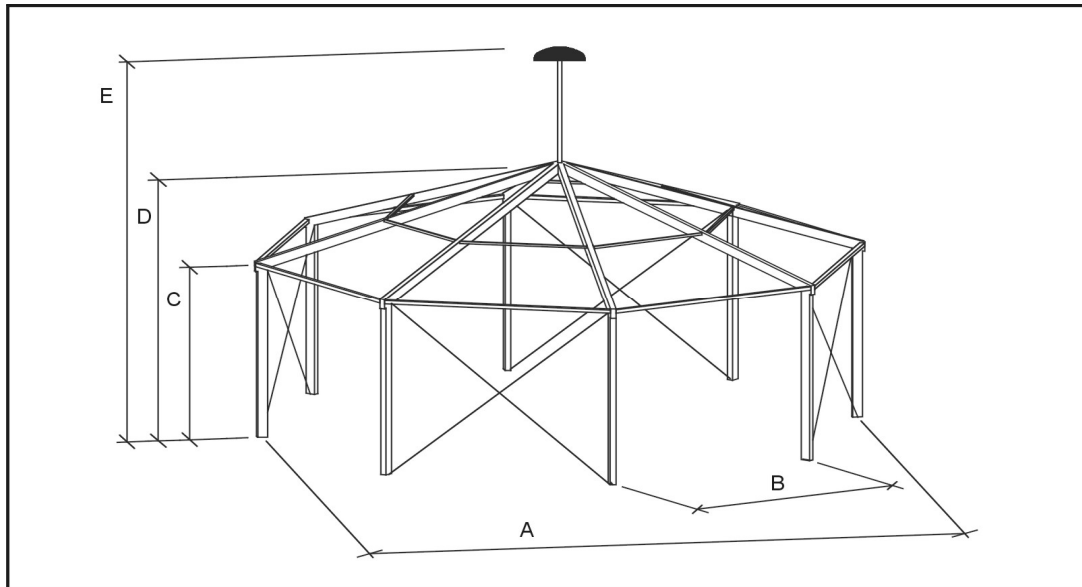

System Measures

Diameter	(A)	12.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.80 m
Peak height	(E)	8.30 m
Truss-distance	(B)	4.62 m
Longest component		6.28 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 15.3/340 · Model: 756

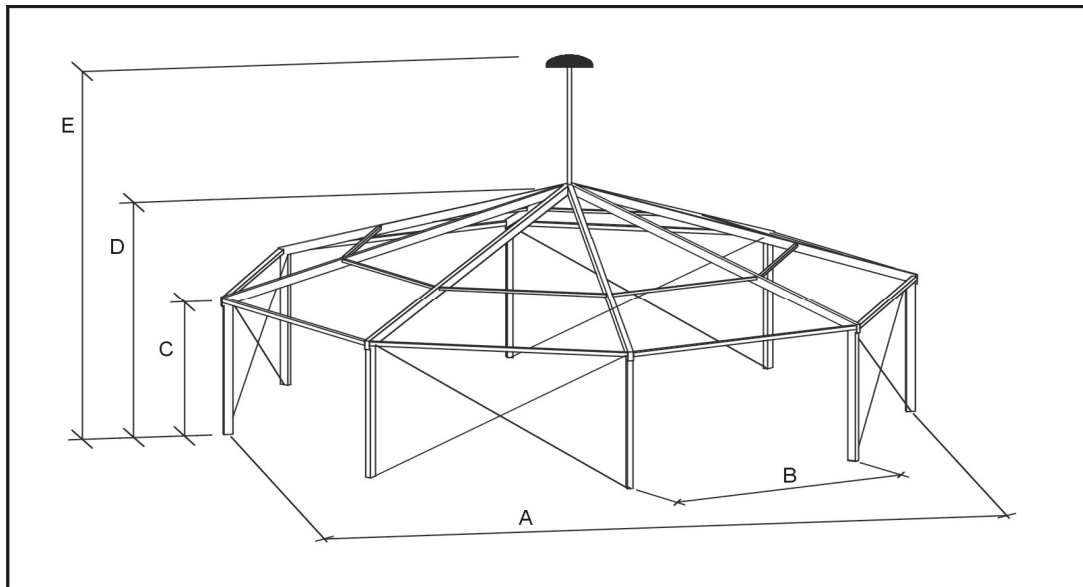

System Measures

Diameter	(A)	15.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	5.69 m
Peak height	(E)	8.60 m
Truss-distance	(B)	5.77 m
Longest component		8.06 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 15.3/400 · Model: 757

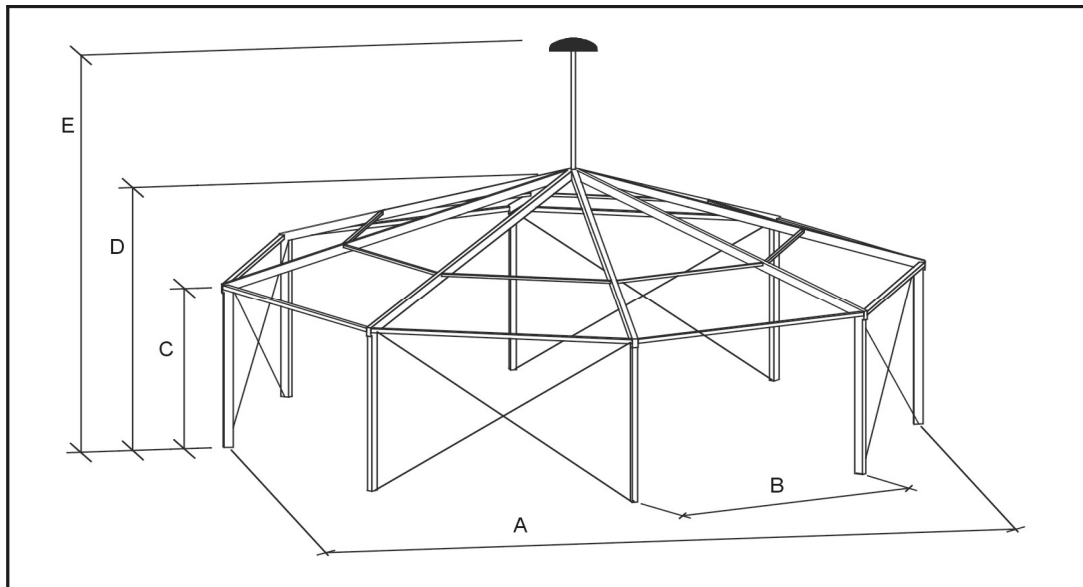

System Measures

Diameter	(A)	15.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	6.29 m
Peak height	(E)	9.20 m
Truss-distance	(B)	5.77 m
Longest component		8.06 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 20.3/340 · Model: 761

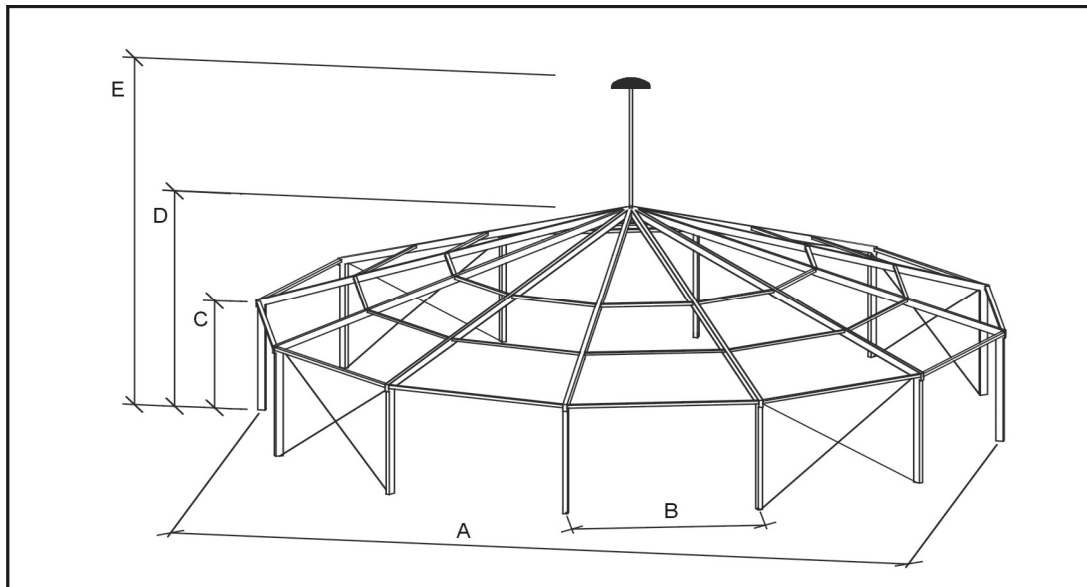

System Measures

Diameter	(A)	20.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	6.50 m
Peak height	(E)	9.90 m
Truss-distance	(B)	5.19 m
Longest component		10.68 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 20.3/400 · Model: 762

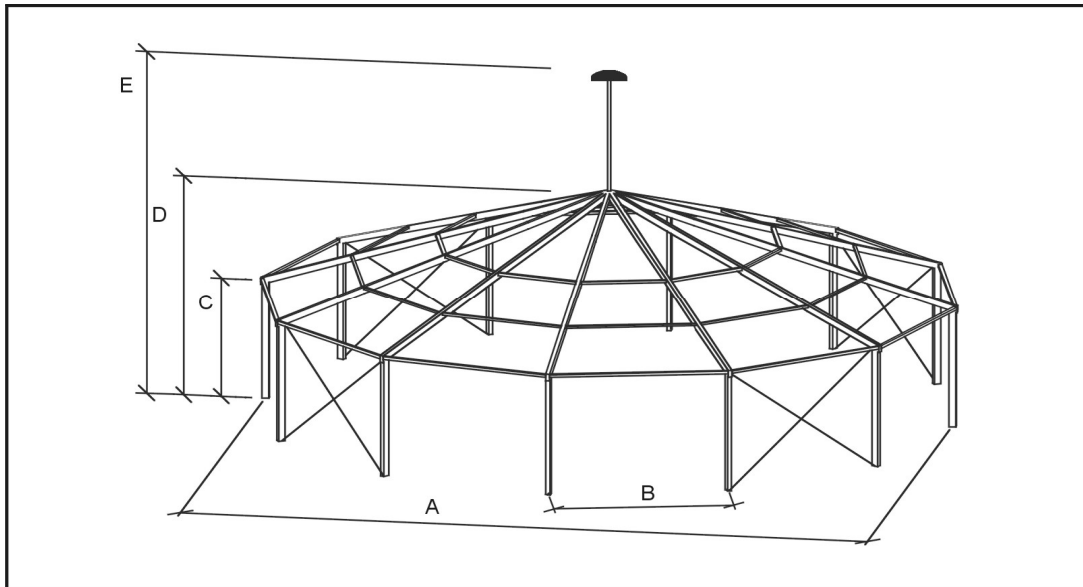

System Measures

Diameter	(A)	20.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	7.00 m
Peak height	(E)	10.50 m
Truss-distance	(B)	5.19 m
Longest component		10.68 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 25.3/340 · Model: 572

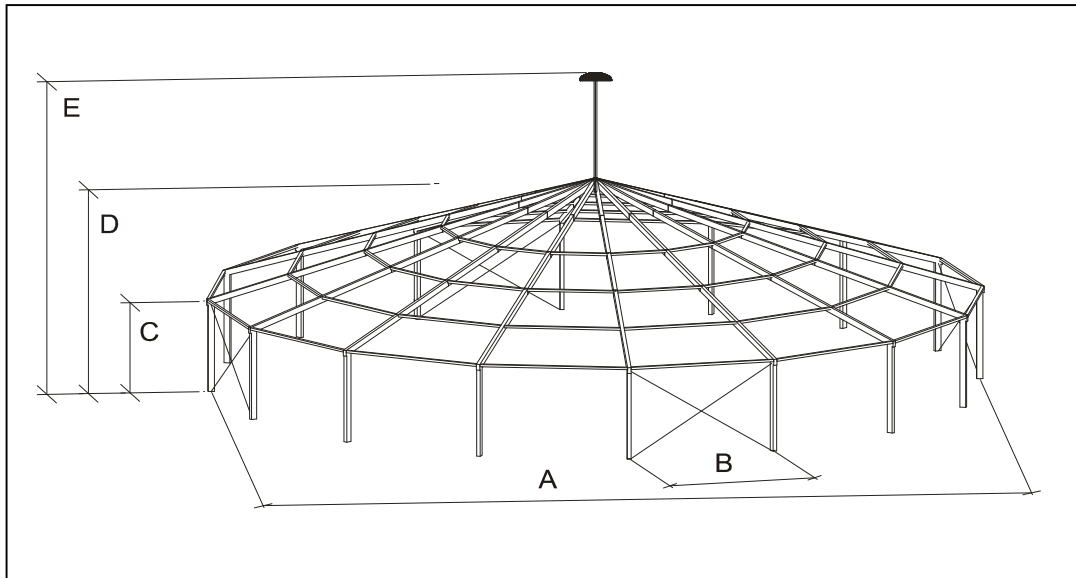

System Measures

Diameter	(A)	25.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	7.31 m
Peak height	(E)	10.80 m
Truss-distance	(B)	4.89 m
Longest component		8.06 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782

Subject to technical modifications!



uniflex Domicile Party and Exhibition Hall

Type: 25.3/400 · Model: 744

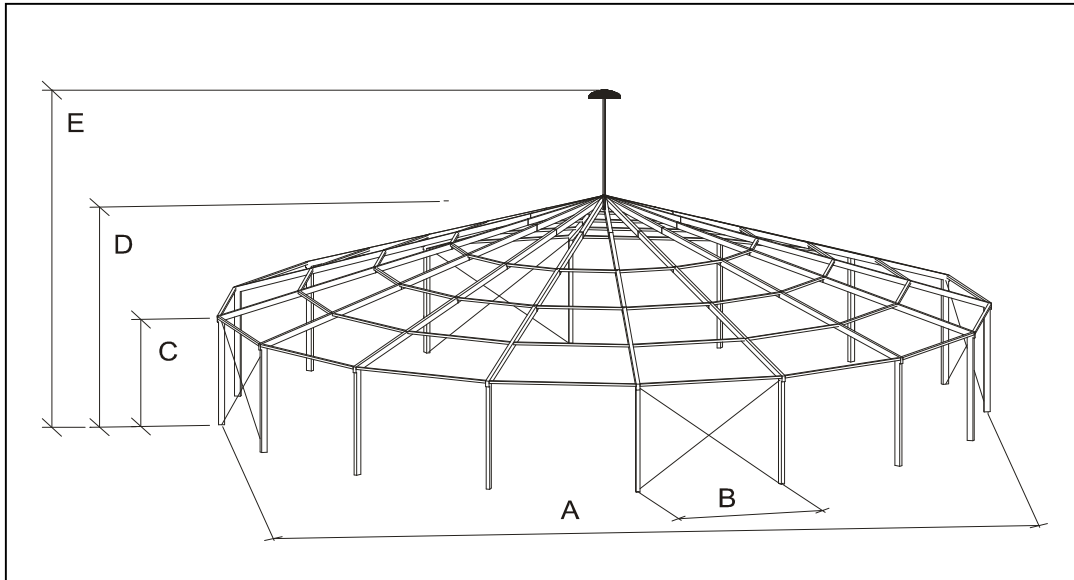

System Measures

Diameter	(A)	25.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	7.91 m
Peak height	(E)	11.40 m
Truss-distance	(B)	4.89 m
Longest component		8.06 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782

Subject to technical modifications!