Fast Opening Domes



A unique protective sphere.

Our domes are designed to **protect sensitive equipment** such as radars, missiles, vehicles or helicopters under extreme climate conditions.

Composed of a galvanized steel frame and a heavy-duty PVC coated fabric cover, the domes are available in standards diameters of: 9, 11, 13, 16, 20 and 24 meters.

The dome shelters can open extremely fast: operated by an electric gearbox, the opening and closing of the dome takes less than 30 seconds and is fitted with a manual safety system.

Worldwide service and support are provided by our specialised technicians.

Additional equipment:

- Heating
- Air Conditioning
- Humidity Control
- Lighting

Load resistance:

Wind: 204 km/h
Snow: 110 daN/m²

Fields of use:

- Humidity controlled storage of sensitive equipment
- Protection for air defense systems (radars & launchers)
- Helicopter sheltering

Colours:

- Sand
- White
- NATO Green



- Unique and attractive design.
- Quick automatic opening and closing (emergency opening is possible to 30 sec.), allowing quick access & usage of the covered equipment.
- Totally weather tight and adapted to humidity controlled storage.
- Highly resistant.
- Perfect to protect sensitive equipment.
- Low maintenance required.

Bachmann RDS 58 A rue du Dessous des Berges 75013 Paris Phone: +33 1 46 72 42 69 Fax: +33 1 45 85 48 46

E-Mail: contacts@losbergerdeboer.com

www.losbergerdeboer.com




Fast Opening Domes







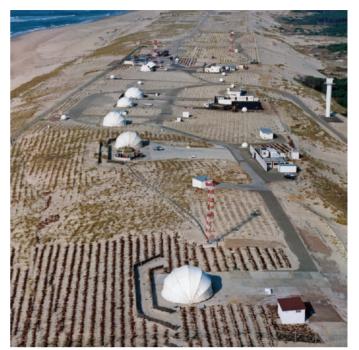







Technical Information

Radome Type (diameter)	9 m	11 m	13 m	16 m	20 m	24 m
Height (m/ft)	5 / 16.4	6 / 19.7	7 / 23	9 / 29.5	11.5 / 36.1	10 / 32.8
Volume (m³)	200	360	580	1,000	1,500	2,800
Weight (t)	2.9	4.1	5.7	8.5	12	20
Staff (persons)	3	3	3	3	3	6
Setup time (day)	2	2	2	3	4	6
Transport (container ISO 20')	1	1	2	3	4	4

Bachmann RDS 58 A rue du Dessous des Berges

75013 Paris

Phone: +33 1 46 72 42 69 Fax: +33 1 45 85 48 46

E-Mail: contacts@losbergerdeboer.com