

Watchtower Container



Instant protection against attackers

Thanks to their **raisable hydraulic platform**, they can be deployed in approximately **15 minutes** to offer fast and efficient protection on mobile field camps.

Our Watchtower Container are built within a 10ft 1DD ISO container and are CSC certified for safe maritime transport and stacking.


Power:

- Voltage system: 3+N+PE AC, 230/400V
- Power consumption: 5.6 kW
- Electric connection: 16A, 5 poles socket

Ballistic Resistance:

- Grade: Armstal600
- Thickness: 8.5 mm (+/-0.9 mm)
- Protection level: Stanag Level II (.357 Magnum JSP; 9mm Luger FMJ)

Width (m)	2.44
Length (m)	2.99
Max. Height (m)	5.51
Platform height (m)	2.11
Platform dimensions (m)	2.1 x 1.6
Platform bearing capacity (kg)	350
Total weight (T)	10

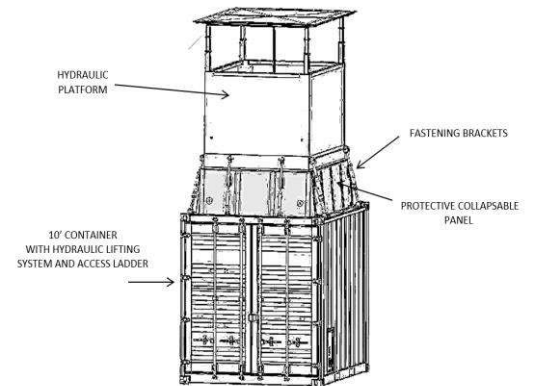

- CSC certified ISO containers
- Bespoke design
- Heavy-duty build
- Quick couplings for electric network

We reserve the right to change specifications of products without prior notice

Bachmann RDS
58 A rue du Dessous des Berges
75013 Paris

Phone: +33 1 46 72 42 69
Fax: +33 1 45 85 48 46
E-Mail: contacts@losbergerdeboer.com

www.losbergerdeboer.com


LOSBERGER DE BOER
BACHMANN RDS